




SPECIFICATIONS

Model	RFAnt-2458OD-4570	
Freq. Range-MHz	2400 ~ 2483	5150 ~ 5850
Max Gain-dBi	4.5	7
Average Gain-dBi	3	5
V.S.W.R.	<2.0:1	
Impedance-Ω	50	
Polarization	Linear, Vertical	
Max. Power-W	2	
Connector Type	N Plug (M)	
Dimension-mm	Φ20 x 157	
Weight-gm	41.5	
Operating Temp.-°C	-20 ~ +65	
Wind Speed Survival (Km/Hr)	216	
Humidity (Non-Condensation)	95% @ 25°C	
Lightning Protection	External Lightning Arrestor	
Random Colour	Black	
Body Material	PC	
Connector	Brass	




E-Plane Field Pattern

H-Plane Field Pattern

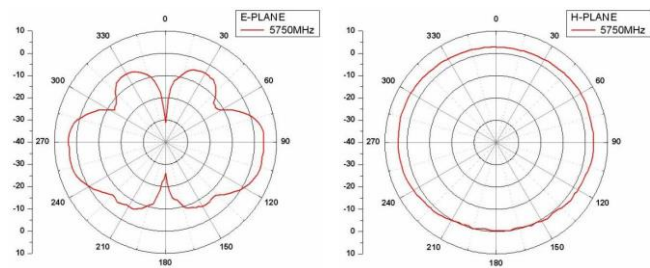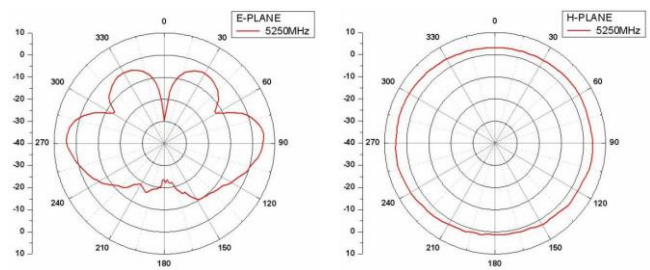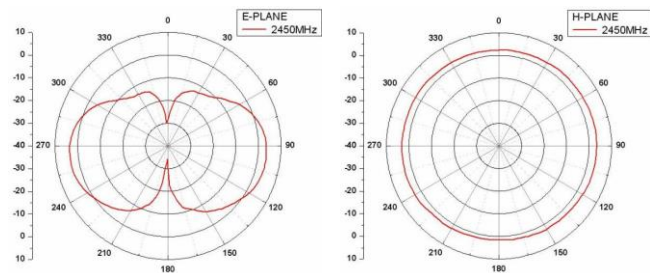

Antenna Drawing

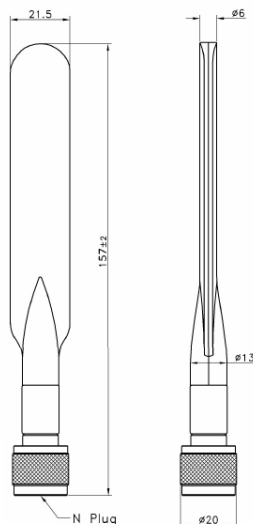

Specification are subject to changes without prior notice due to engineering improvement. All brands and product names are trademarks or registered trademarks of their respective holders. *Wireless range and performance may vary with environment.