




SPECIFICATIONS

Model	RFAnt-24&51CL-3&5-K1	
Freq. Range-MHz	2400 ~ 2500	5100 ~ 5850
Bandwidth-MHz	100	750
Gain-dBi	3	5
V.S.W.R.	≤2	≤2
Impedance-Ω	50	
Polarization	Vertical	
Max. Power-W	50	
Connector Type	N-Female or Customized	
Connector Place	Bottom	
Dimension-mm	Φ145 x H35	
Weight-g	280 (Casing: 42)	
Mounting Way	Fixed With Nut	
Materials Housing	ABS & Metal	
Temperature	-30°C ~ +80°C	
Wind Loading (Max)	210Km/Hr	
Humidity (Non-Condensation)	95%	

Installation Sketch

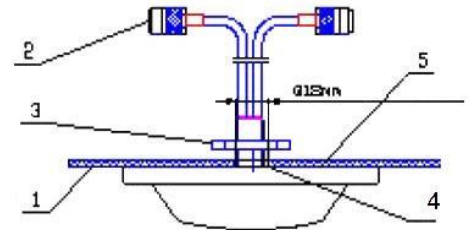

1. Ceiling
2. Connector
3. Nut
4. Hole
5. Antenna


APPLICATIONS

- 2400MHz to 2500MHz, 5100MHz to 5850MHz Band
- WLAN/WIMAX System
- Indoor Coverage

FEATURES

- Broadband
- Compact Size, Low Profile, Perfect Performance
- Ceiling Mount

E-Plane Field Pattern

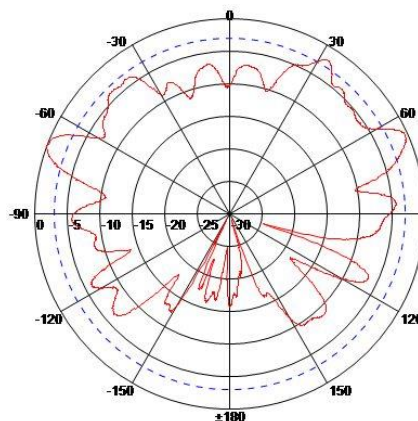

H-Plane Field Pattern

